

RCD Sockets - Switched 30mA Active

30 mA

+


Active

Socket

- Electrical latching - Needs to be reset after power failure
- High intensity LED power on indicator
- Individually switched socket outputs
- Twin sockets fitted with twin earth terminals

Technical Data

Voltage	230V AC ~ 50Hz
Max operating current	13A (13A inductive)
Rated trip current	30mA
Typical trip speed	Less than 20mS (typical)
RCD contact break	Double pole
Latching	Electrical, needs to be reset after power failure (Active)
Responsive to	Pulsating DC earth faults
Conforms to	BS 7288:1990, Amd 1 and BS 1363-2:1995 Amd 1-3
EMC Emissions	EN 55014-1:2006 & EN 55014-1:2000 inc A1:2001 & A2:2002
EMC Immunity	EN 61543:1996 inc A11:2003, A12:2005 & A2:2006

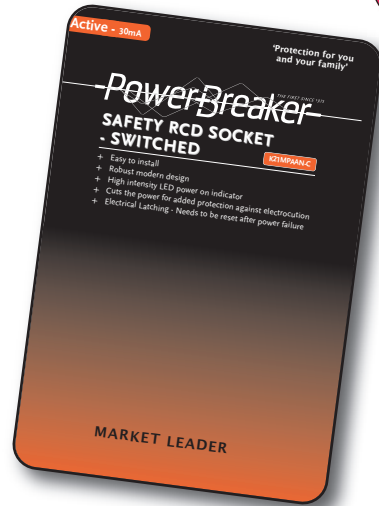

Part No	Description
K21WPAAN-C	RCD Single Switched Socket Slim profile Moulded front plate Fits standard 25mm back box
K22WPAAN-C	RCD Twin Switched Socket Slim profile Moulded front plate Fits standard 25mm back box
K21MPAAN-C	RCD Single Switched Socket Complete with metal backbox
K22MPAAN-C	RCD Twin Switched Socket Complete with metal backbox

