


RCD Sockets - Switched 10mA Active



- Electrical latching - Needs to be reset after power failure
- High intensity LED power on indicator
- Individually switched socket outputs
- Twin sockets fitted with twin earth terminals





Technical Data

Voltage	230V AC ~ 50Hz
Max operating current	13A (13A inductive)
Rated trip current	10mA
Typical trip speed	Less than 20mS (typical)
RCD contact break	Double pole
Latching	Electrical, needs to be reset after power failure (Active)
Responsive to	Pulsating DC earth faults
Conforms to	BS 7288:1990, Amd 1 and BS 1363-2:1995 Amd 1-3
EMC Emissions	EN 55014-1:2006 & EN 55014-1:2000 inc A1:2001 & A2:2002
EMC Immunity	EN 61543:1996 inc A11:2003, A12:2005 & A2:2006



'Super Sensitive - 10mA'

Part No	Description
K21WPAAN10-C	RCD Single Switched Socket Slim profile Moulded front plate Fits standard 25mm back box
K22WPAAN10-C	RCD Twin Switched Socket Slim profile Moulded front plate Fits standard 25mm back box
K21MPAAN10-C	RCD Single Switched Socket Complete with metal backbox
K22MPAAN10-C	RCD Twin Switched Socket Complete with metal backbox

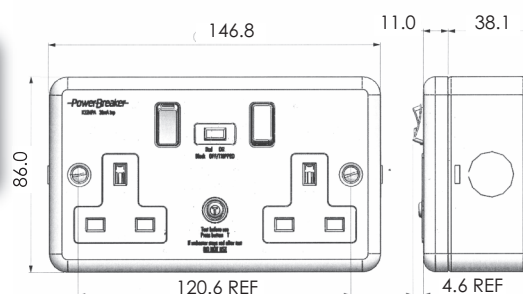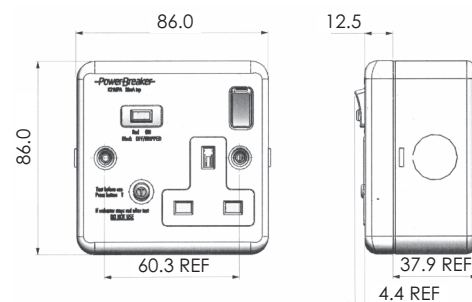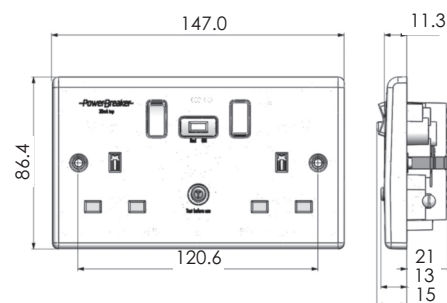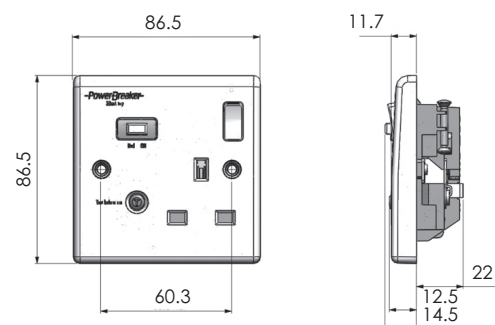

+44 (0) 1279 772 772



+44 (0) 1279 422 007